




Contact: 3Dprinting@owenscorning.com

XSTRAND™ 3D Printing filaments by Owens Corning: redefining additive manufacturing performance

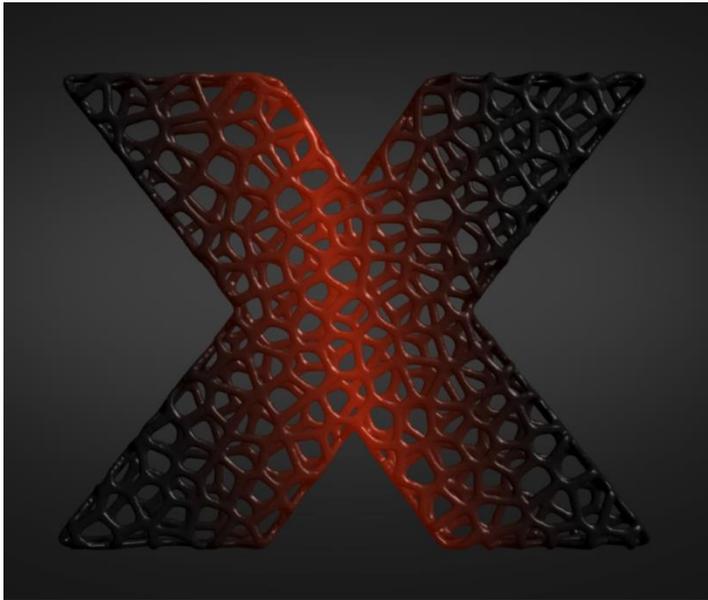

Products presentation	Products applications	Value proposition	Products references	3D Printer settings	Storage and safety	Customer testimonial	Owens Corning	Contact & Orders
---------------------------------------	---------------------------------------	-----------------------------------	-------------------------------------	-------------------------------------	------------------------------------	--------------------------------------	-------------------------------	--------------------------------------



Reinforced materials enabling new performance



Contact: 3Dprinting@owenscorning.com

Copyright © 2018 Owens Corning. All Rights Reserved.



- ◆ Materials designed for functional prototyping and industrial applications
- ◆ Excellent layer adhesion and reduced warping effect compare to neat materials
- ◆ Very stiff and strong materials
- ◆ Large operational temperature range
-20°C to 120°C
- ◆ Good chemical and UV resistance
- ◆ Engineered reinforced plastics
XSTRAND™ GF30-PP
XSTRAND™ GF30-PA6



Products presentation

Products applications

Value proposition

Products references

3D Printer settings

Storage and safety

Customer testimonial

Owens Corning

Contact & Orders



Applications for XSTRAND™ filament in many industries



Contact: 3Dprinting@owenscorning.com

Copyright © 2018 Owens Corning. All Rights Reserved.

INDUSTRY & TOOLING



SMALL APPLIANCES & ELECTRONICS



TRANSPORTATION



SPORT & LEISURE




Products presentation	Products applications	Value proposition	Products references	3D Printer settings	Storage and safety	Customer testimonial	Owens Corning	Contact & Orders
-----------------------	------------------------------	-------------------	---------------------	---------------------	--------------------	----------------------	---------------	------------------




XSTRAND™ outperforms ABS and PA6 competition



Contact: 3Dprinting@owenscorning.com

Copyright © 2018 Owens Corning. All Rights Reserved.

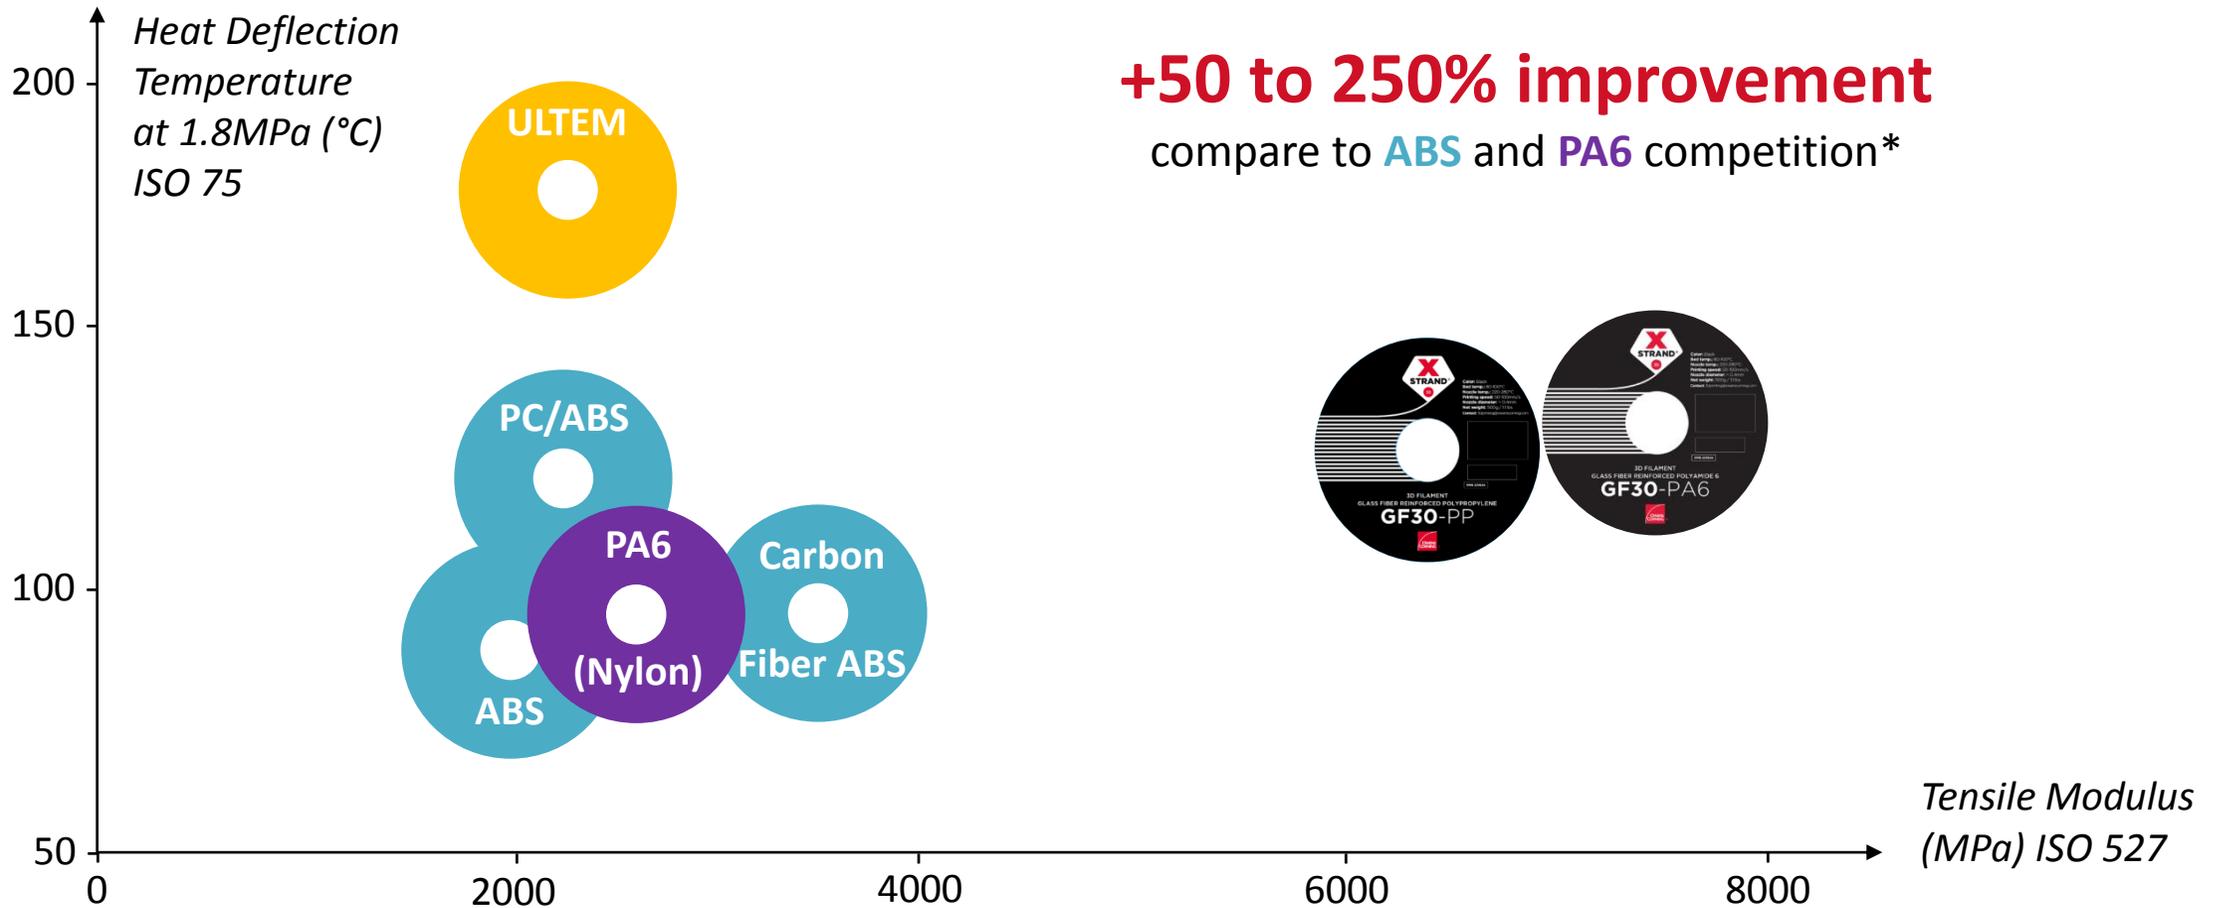

*Values based on Owens Corning's internal tests

Products presentation	Products applications	Value proposition	Products references	3D Printer settings	Storage and safety	Customer testimonial	Owens Corning	Contact & Orders
-----------------------	-----------------------	--------------------------	---------------------	---------------------	--------------------	----------------------	---------------	------------------



XSTRAND™ references meet industry needs



◆ GF30-PP references available in black color:

XSTRAND™ GF30-PP	1,75mm	500g spool
XSTRAND™ GF30-PP	2,85mm	500g spool
XSTRAND™ GF30-PP	1,75mm	2200g spool
XSTRAND™ GF30-PP	2,85mm	2200g spool



◆ GF30-PA6 references available in black color:

XSTRAND™ GF30-PA6	1,75mm	500g spool
XSTRAND™ GF30-PA6	2,85mm	500g spool
XSTRAND™ GF30-PA6	1,75mm	2200g spool
XSTRAND™ GF30-PA6	2,85mm	2200g spool



Best settings for FFF 3D printers



- ◆ Designed to be compatible with most of open Fused Filament Fabrication 3D printers available on the market



Warning:

When melted, XSTRAND™ filament can be abrasive due to its glass reinforcement. Printing with XSTRAND™ may reduce brass nozzles and extruder driving wheels lifetime. For a better experience, using hardened steel nozzles and extruder driving wheels is advised.

Recommended printing parameters:



Nozzle temperature:
220-280°C
Bed temperature:
80-110°C



Printing speed:
30-100mm/s



Nozzle diameter:
> 0.4mm



Products presentation	Products applications	Value proposition	Products references	3D Printer settings	Storage and safety	Customer testimonial	Owens Corning	Contact & Orders
-----------------------	-----------------------	-------------------	---------------------	----------------------------	--------------------	----------------------	---------------	------------------




Recommended 3D printer components for XSTRAND™ GF30-PP tested by Owens Corning



Contact: 3Dprinting@owenscorning.com


Copyright © 2018 Owens Corning. All Rights Reserved.

◆ Hardened steel Hercules™

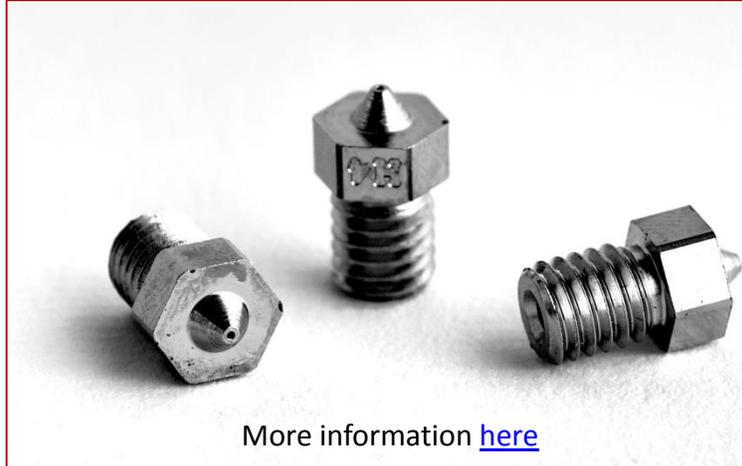

More information [here](#)

Dedicated perforated plate (Zortrax)

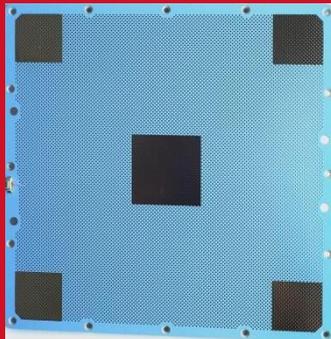

HDPE sheet



PP adhesive



Solution for glass plate



Products presentation	Products applications	Value proposition	Products references	3D Printer settings	Storage and safety	Customer testimonial	Owens Corning	Contact & Orders
-----------------------	-----------------------	-------------------	---------------------	----------------------------	--------------------	----------------------	---------------	------------------




Recommended 3D printer components for XSTRAND™ GF30-PA6 tested by Owens Corning



Contact: 3Dprinting@owenscorning.com


Copyright © 2018 Owens Corning. All Rights Reserved.

◆ Hardened steel Hercules™

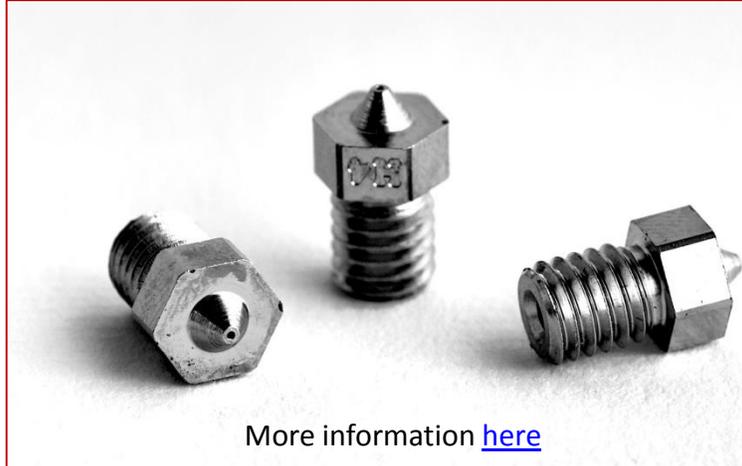

More information [here](#)

Dedicated perforated plate (Zortrax)

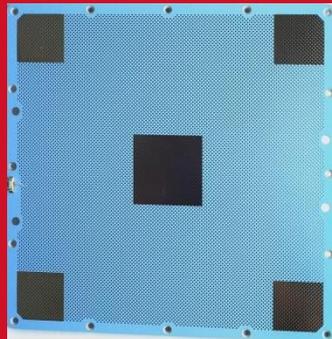

PEI sheet



PI (Kapton) adhesive



Products presentation

Products applications

Value proposition

Products references

3D Printer settings

Storage and safety

Customer testimonial

Owens Corning


Contact & Orders



STORAGE

XSTRAND™ filaments must be stored in a dry and temperate location. The product should remain in its original packaging, preferably closed, until beginning of use.

- **GF30-PP** product is not very sensitive to moisture and does not require to be unclosed in a dry environment during printing.
- **GF30-PA6** is very sensitive to moisture and must be dried at least 4h in the oven at 80°C prior to use to allow optimal printing results. The spool needs to be stored in a dry case (Pelican type) even during printing.

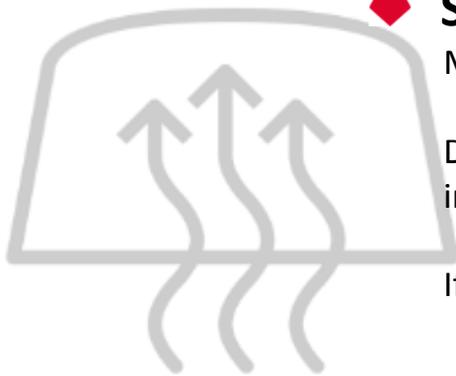

SAFETY

Material Safety Data Sheet available [here](#).

During use of the products, extrusion fumes may be released. Ensure sufficient ventilation and air extraction to avoid inhalation. In case of insufficient ventilation, wear suitable respiratory equipment.

If you apply a sand process after printing your part, make sure you wear safety gloves and appropriate dust mask.




XSTRAND™ material redefines Rossignol opportunities



Contact: 3Dprinting@owenscorning.com

Copyright © 2018 Owens Corning. All Rights Reserved.

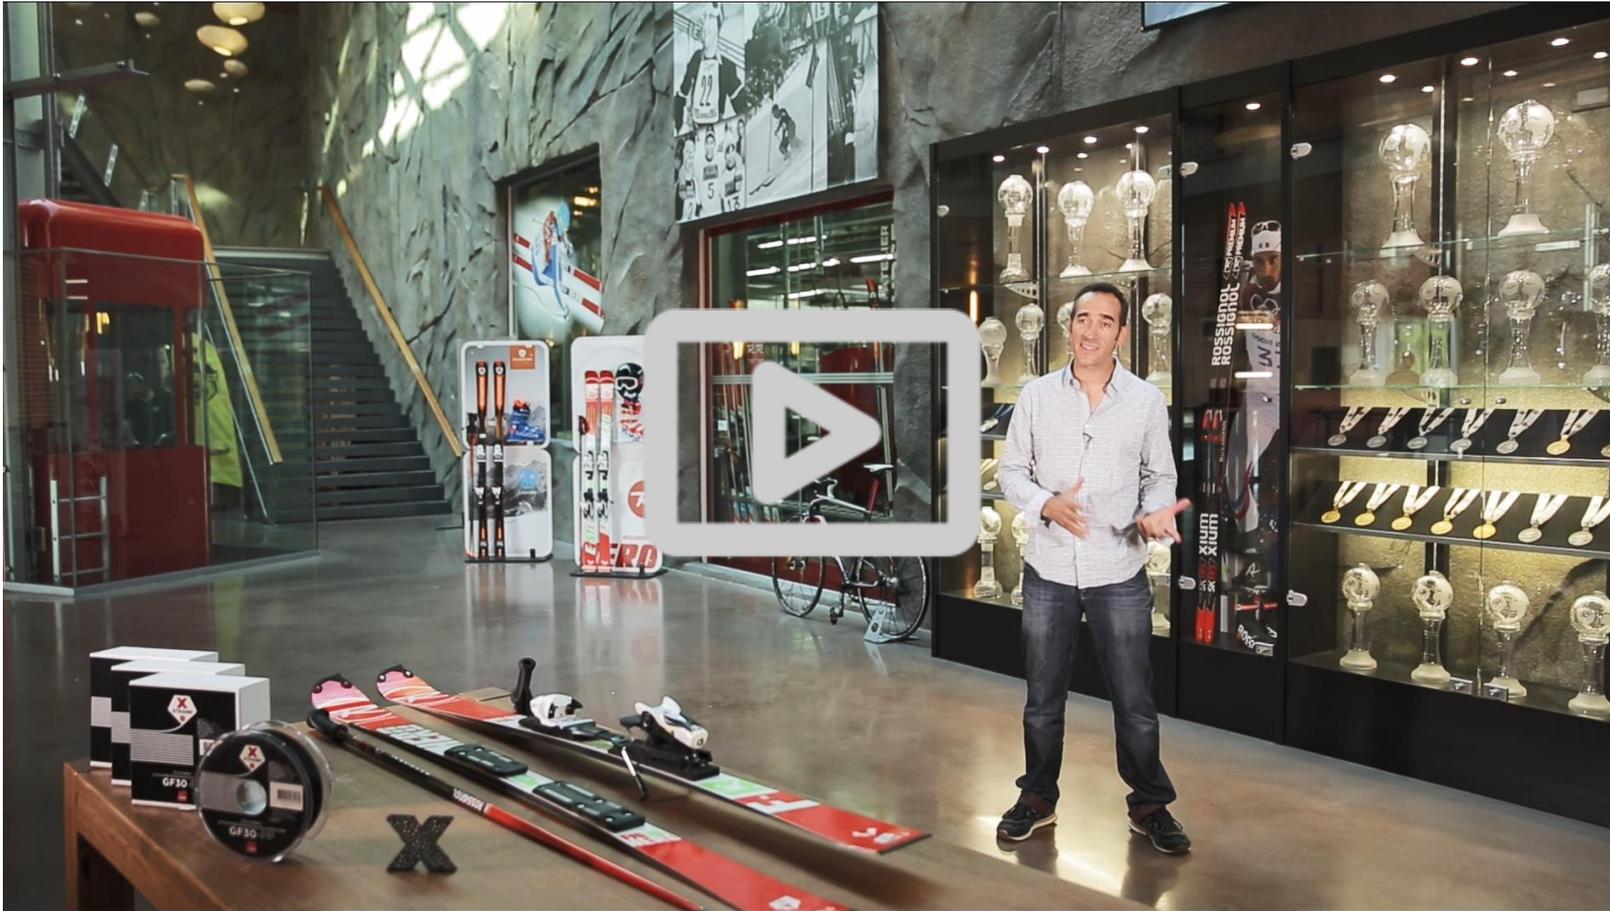

“Owens Corning's new-generation materials mean we can make functional prototypes of our products.”

Nicolas Puget
Advanced Research Manager,
Rossignol group

Products presentation

Products applications

Value proposition

Products references

3D Printer settings

Storage and safety

Customer testimonial

Owens Corning

Contact & Orders



Owens Corning: Global company founded in 1938



Contact: 3Dprinting@owenscorning.com

Copyright © 2018 Owens Corning. All Rights Reserved.



A **world leader** in glass fiber composites



More than **500 researchers** in five **R&D** centers



2016 Sales **\$5.7 billion**



17,000 Employees in **33** countries



3D Printing labs in France and in Ohio, USA



Products presentation	Products applications	Value proposition	Products references	3D Printer settings	Storage and safety	Customer testimonial	Owens Corning	Contact & Orders
---------------------------------------	---------------------------------------	-----------------------------------	-------------------------------------	-------------------------------------	------------------------------------	--------------------------------------	----------------------	--------------------------------------



Contact & Orders:

3Dprinting@owenscorning.com

Revision date: January 22nd, 2018

This information and data contained herein is offered solely as a guide in the selection of reinforcement. Rating contained in this publication is based on actual laboratory data, field test experience and observation of overall market use. We believe this information to be reliable, but do not guarantee its applicability to the user's process or assume any responsibility or liability arising out of its use or performance. The user agrees to be responsible for thoroughly testing any application to determine its suitability before committing to production. It is important for the user to determine the properties of its own commercial compounds when using this or any other reinforcement. Because of numerous factors affecting results, we make no warranty of any kind, express or implied, including those of merchantability and fitness for a particular purpose. Statements in this publication shall not be construed as representations or warranties or as inducements to infringe any patent or violate any law safety code or insurance regulation. Owens Corning reserves the right to modify this document without prior notice. Pub. 10022734. XSTRAND™ 3D Range product sheet Rev2 January 2018

Products presentation	Products applications	Value proposition	Products references	3D Printer settings	Storage and safety	Customer testimonial	Owens Corning	Contact & Orders
-----------------------	-----------------------	-------------------	---------------------	---------------------	--------------------	----------------------	---------------	------------------