



Guider IIs



Dupont PA-CF




280°C



90°C



Note: Print with hardend nozzle.





Guider IIs



Flashforge PA-CF



280°C



90°C



Note: Print with hardend nozzle.





Guider IIs




Flashforge PA-CF



280°C



90°C

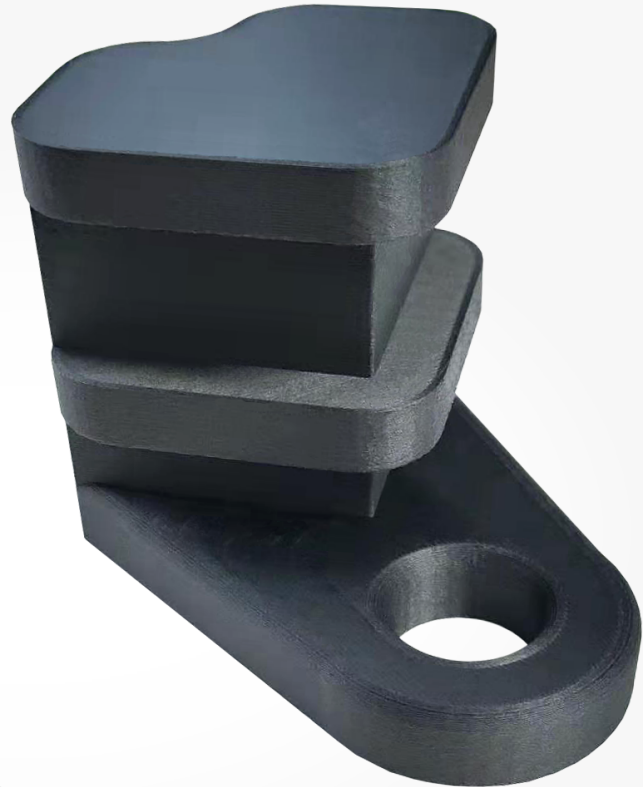



Guider IIs



Flashforge PA-CF



280°C



90°C

