

Hyper FFF™

Additive Productivity

Hyper FFF™ Is a System Engineered to Efficiently Produce Final Parts



Hardware



Software




Material



Algorithm

100% Quality, 300%+ Productivity


*Source: Raise3D

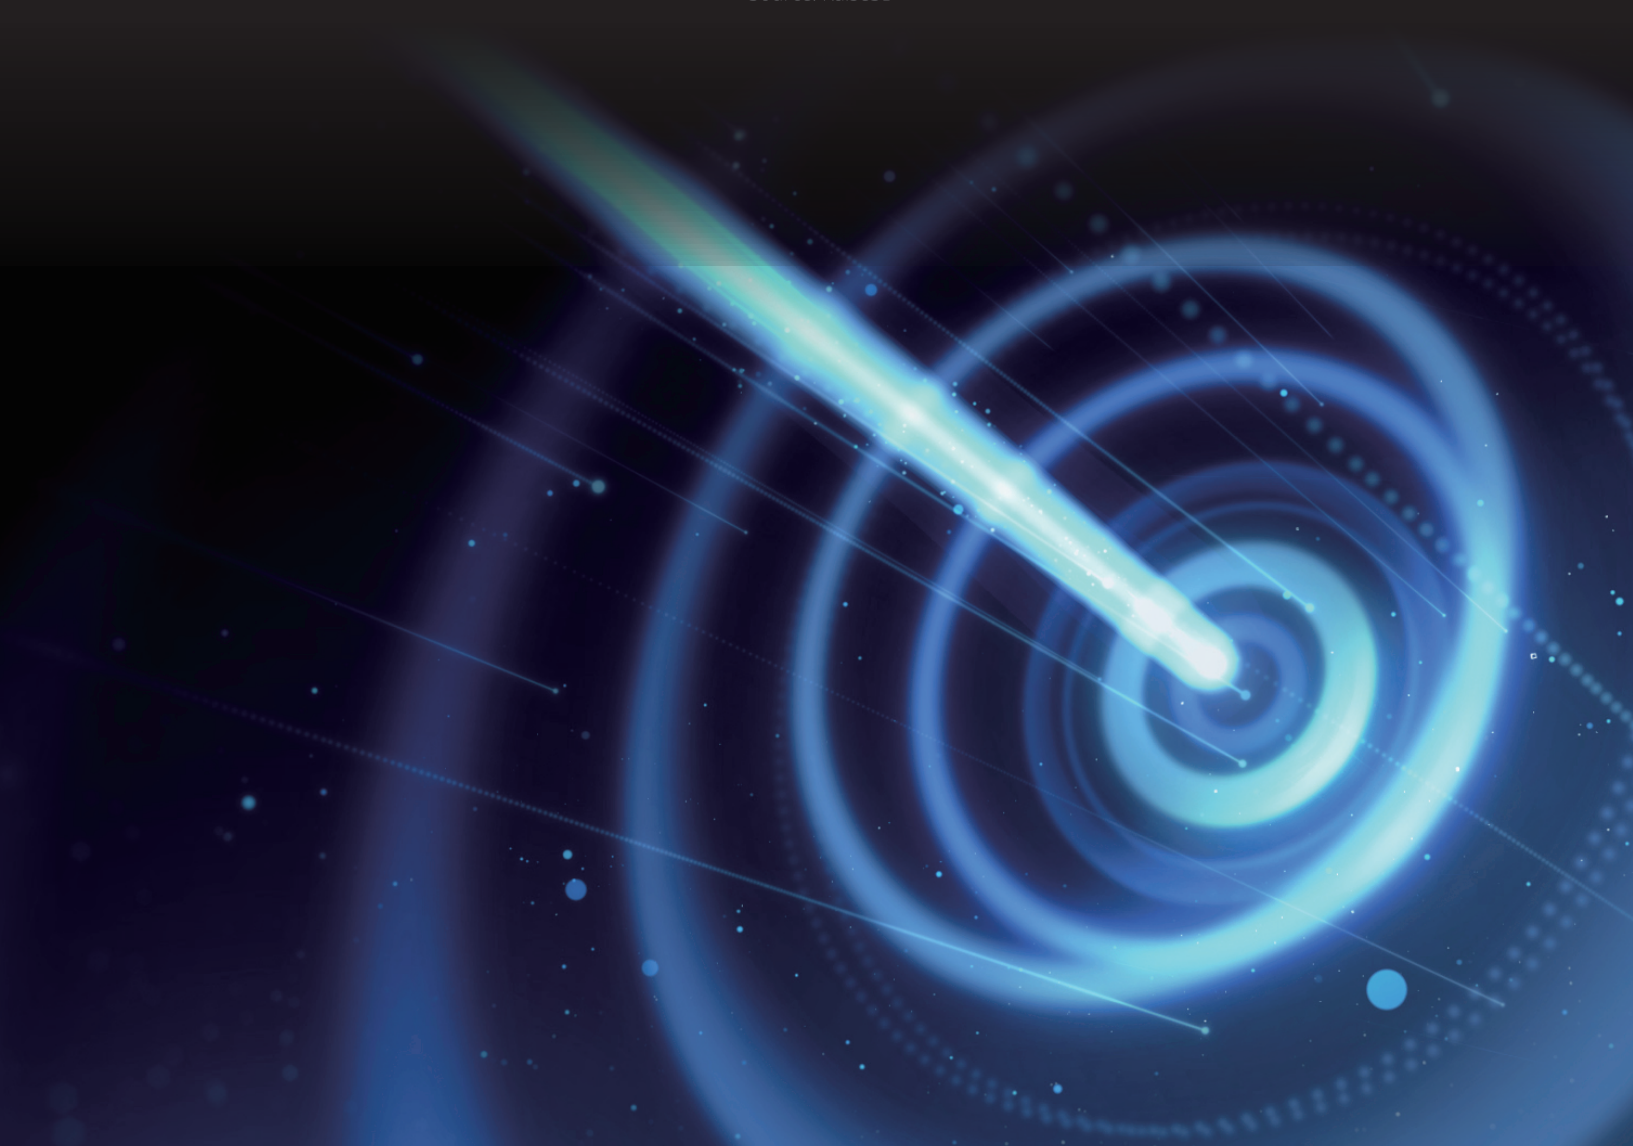

Raise3D Hyper Speed Upgrade Kit

(Pro3 Series Only)

To initiate Additive Productivity for your Pro3 Series printer

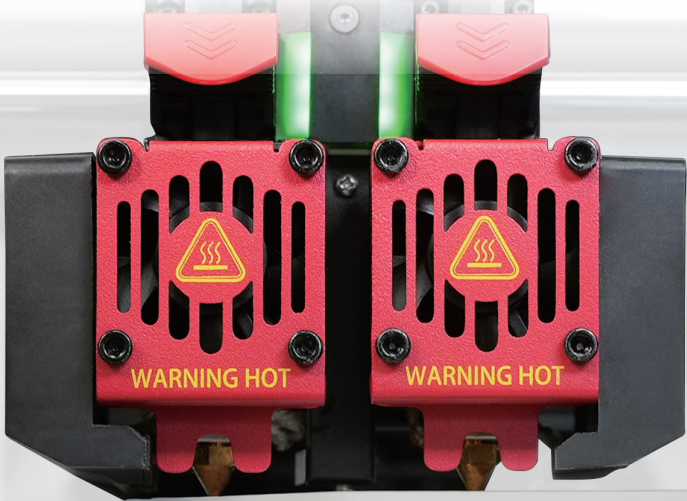

100% Quality, 300%+ Productivity

*Source: Raise3D

Printing Speed



50 mm/s 350 mm/s

Acceleration



1000 mm/s² 10,000 mm/s²



2 Hyper Speed
Hot Ends 0.4mm



Hyper Speed
Auto Calibrator



Hyper Speed
PLA & ABS Filaments



Activation Letter

Product	Raise3D Hyper Speed Hot End 0.4mm <small>(Pro3 Series Only)</small>	Raise3D Hyper Speed Auto Calibrator <small>(Pro3 Series Only)</small>	Raise3D Hyper Speed PLA Filament <small>(1.75 mm)</small>	Raise3D Hyper Speed ABS Filament <small>(1.75 mm)</small>
Weight	130 g	95 g	1 kg	1 kg
Color	—	—	White	Natural
Size	117 × 80 × 73 mm	117 × 80 × 73 mm	—	—
Recommended printing temperature	—	—	220-250°C	240-270°C