



## Bambu Filament

Technical Data Sheet V1.0

# PLA Dynamic

### • Basic Info

**Bambu PLA Dynamic's** color-changing ability occurs with exposure to UV light. These distinct characteristics enable a range of unique applications, such as serving as a UV level tag, specialized teaching tools, and even jewelry. The PLA Dynamic filaments offer the same ease of printing as regular PLA while maintaining the excellent mechanical performance and quality as with all Bambu filament products.

### • Specifications

Subjects	Data
Diameter	1.75 mm
Net Filament Weight	1 kg
Spool Material	ABS (Temperature resistance 70 °C)
Spool Size	Diameter: 200 mm; Height: 67 mm

### • Recommended Printing Settings

Subjects	Data
Drying Settings before Printing	Blast Drying Oven: 55 °C, 8 h X1 Series Printer Heatbed: 65 - 75 °C, 12 h
Printing and Storage Humidity	< 20% RH (Sealed with desiccant)
Nozzle Size	0.2, 0.4, 0.6, 0.8 mm
Nozzle Temperature	190 - 230°C
Build Plate Type	Cool Plate, High Temperature Plate or Textured PEI Plate
Bed Surface Preparation	Glue
Bed Temperature	35 - 45°C
Cooling Fan	Turn on
Printing Speed	< 250 mm/s
Retraction Length	0.6 - 1.0 mm
Retraction Speed	20 - 40 mm/s
Chamber Temperature	25 - 45°C
Max Overhang Angle	55°

Max Bridging Length	30 mm
Support	Support for PLA

## • Properties

Bambu Lab has tested the differing aspects in the performance of PLA Dynamic material, including physical, mechanical, and chemical properties. Typical values are listed as followed:

Physical Properties		
Subjects	Testing Methods	Data
Density	ISO 1183	1.26 g/cm <sup>3</sup>
Melt Index	210 °C, 2.16 kg	18.2 ± 1.9 g/10 min
Melting Temperature	DSC, 10 °C/min	156 °C
Glass Transition Temperature	DSC, 10 °C/min	54 °C
Crystallization Temperature	DSC, 10 °C/min	/
Vicar Softening Temperature	ISO 306, GB/T 1633	56 °C
Heat Deflection Temperature	ISO 75 1.8 MPa	51 °C
Heat Deflection Temperature	ISO 75 0.45 MPa	55 °C
Saturated Water Absorption Rate	25 °C, 55% RH	0.44%

Mechanical Properties		
Subjects	Testing Methods	Data
Young's Modulus (X-Y)	ISO 527, GB/T 1040	2120 ± 240 MPa
Young's Modulus (Z)	ISO 527, GB/T 1040	1820 ± 230 MPa
Tensile Strength (X-Y)	ISO 527, GB/T 1040	34 ± 3 MPa
Tensile Strength (Z)	ISO 527, GB/T 1040	27 ± 4 MPa
Breaking Elongation Rate (X-Y)	ISO 527, GB/T 1040	9.3 ± 1.1 %
Breaking Elongation Rate (Z)	ISO 527, GB/T 1040	7.1 ± 0.9 %
Bending Modulus (X-Y)	ISO 178, GB/T 9341	2700 ± 140 MPa
Bending Modulus (Z)	ISO 178, GB/T 9341	2380 ± 210 MPa
Bending Strength (X-Y)	ISO 178, GB/T 9341	83 ± 3 MPa
Bending Strength (Z)	ISO 178, GB/T 9341	65 ± 3 MPa
Impact Strength (X-Y)	ISO 179, GB/T 1043	31.5 ± 2.4 kJ/m <sup>2</sup> ; 9.6 ± 2.1 kJ/m <sup>2</sup> (notched)
Impact Strength (Z)	ISO 179, GB/T 1043	20.8 ± 1.7 kJ/m <sup>2</sup>


Other Physical and Chemical Properties	
Subjects	Data
Odor	Odorless
Composition	Polylactic acid
Skin Hazards	No hazard
Chemical Stability	Stable under normal storage and handling conditions
Solubility	Insoluble in water
Resistance to Acid	Not resistant
Resistance to Alkali	Not resistant
Resistance to Organic Solvent	Not resistant to some organic solvents
Resistance to Oil and Grease	Resistant to most kinds of oil and grease
Flammability	Flammable
Combustion Products	Water, carbon oxides
Odor of Combustion Products	Odorless

- **Specimen Test**


Specimen Printing Conditions	
Subjects	Data
Nozzle Temperature	220°C
Bed Temperature	35°C
Printing Speed	200mm/s
Infill Density	100%

*\* All the specimens were printed at the following settings: Nozzle Temperature = 220 °C, Printing Speed = 200 mm/s, Bed Temperature = 35 °C, Infill Density = 100%. All the specimens were annealed and dried at 55 °C for 8 h before testing. And the suggested annealing temperature of models printed with Bambu PLA Dynamic is 50 to 60 °C, and the time is 6 to 12 hours. The annealing effect depends on the annealing temperature, time and the model itself: size, structure, infill and other printing settings; some prints may deform and warp after annealing. When drying the filament and annealing the prints, it's required to use an oven that has big enough inside volume and can provides even temperature distribution, such as a blast drying oven (forced-air drying oven), and the filament and prints need to be away from the heater, and a micro-wave oven or kitchen oven is not compatible, otherwise the filament and prints can get damaged.*


### 1. Tensile Testing

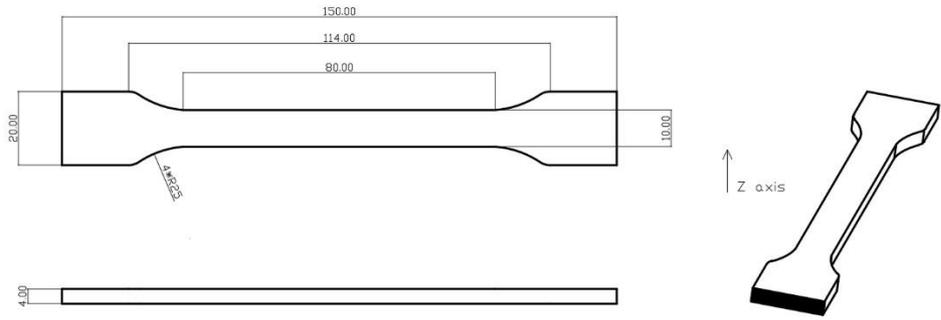

### 2. Bending Testing

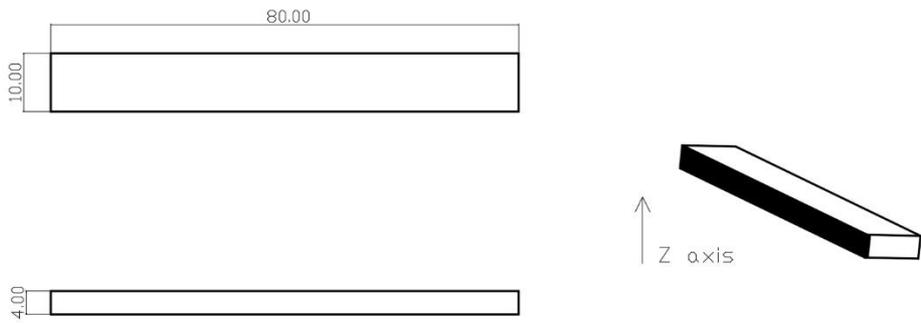

### 3. Impact Testing

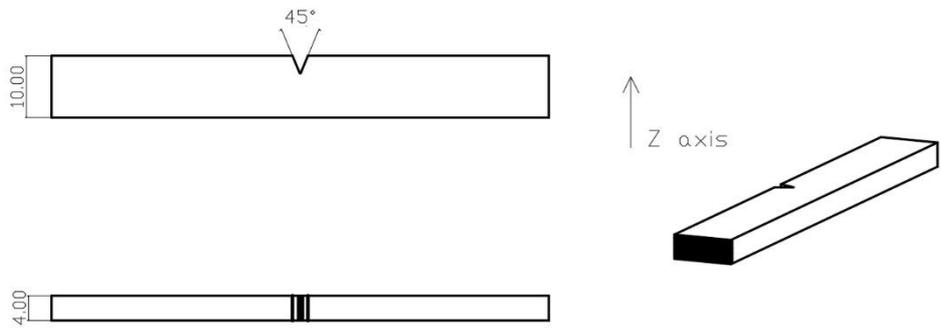

- **Disclaimer**

The performance values are tested by standard samples at Bambu Lab, and the values are for design reference and comparison only. Actual 3D printing model performance is related to many other factors, including printers, printing conditions, printing models, printing parameters, etc.

In the process of using Bambu Lab 3D printing filaments, users are responsible for the legality, safety, and performance indicators of printing. Bambu Lab is not responsible for the use of materials and scenarios and is not responsible for any damage that occurs in the process of using our filaments.